

STEEL WORKS

SASSO



Calamine Naturale R9 Rett. 120x278 - 47^{1/4}"x109^{7/16}"
Metalbrick Green Lux 6x24 - 23^{5/8}"x97^{7/16}"



Calamine Naturale R9 Rett. 120x278 - 47^{1/4}"x109^{7/16}"
White Naturale R9 Rett. 120x278 - 47^{1/4}"x109^{7/16}"
Metalbrick Blue Lux 6x24 - 2^{3/8}"x9^{7/16}"

Steel White Steel Calamine Dark



Naturale R9 Rett.
120x278 - 47^{1/4}"x109^{7/16}"
Steel White
Calamine
Dark
5 patterns



Naturale R10 Rett.
60x120 - 23^{5/8}"x47^{1/4}"
Steel White
Steel
Calamine
Dark
Up to 23 patterns



Naturale R10 Rett.
30x60 - 11^{13/16}"x23^{5/8}"
Steel White
Steel
Calamine
Dark
Up to 92 patterns

Laying with a 2 mm-joint is recommended.
Check the colour matching between different sizes.


Brick Lux 6x24 - 2^{3/8}"x9^{7/16}"




White Lux
91 patterns



Grey Lux
85 patterns

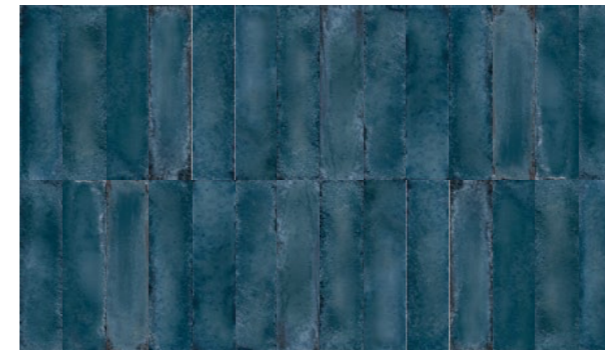

Blue Lux
83 patterns

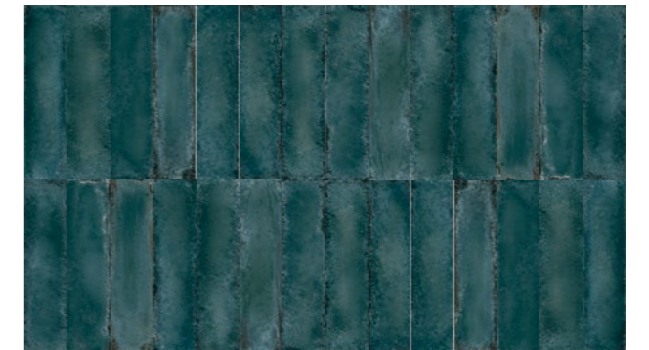

Green Lux
85 patterns



Black Lux
88 patterns

DECORS


Metalriddle Naturale R10 Rett.
60x120 - 2³/₈"x47¹/₄" | 30x60 - 11¹³/₁₆"x23⁵/₈"




Steel White
23 patterns



Steel White
92 patterns

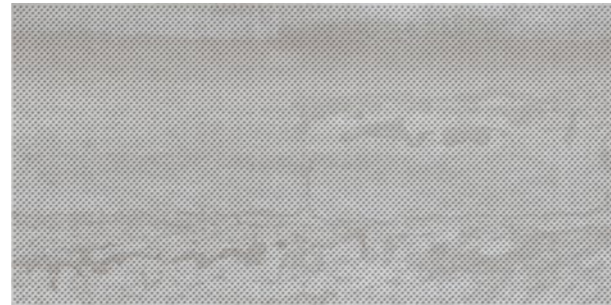


Steel
23 patterns



Steel
92 patterns



Calamine
23 patterns



Calamine
92 patterns




Dark
23 patterns



Dark
92 patterns


Mosaico 5X5* Naturale R10
30x30 - 11¹³/₁₆"x11¹³/₁₆"
Tessere 4,8x4,8 - 1⁷/₈"x1⁷/₈"




Steel White



Steel

















Calamine



Dark

* On fibre mesh backing

TRIMS



	Size					
 Skirting	Naturale R10 Rett. 7x60 - 2 ³ / ₄ "x23 ⁵ / ₈ " Pcs. Box. 15 - LM x Box 9,00	•	•	•	•	
 Stair Tread	Naturale R10 Rett. 33x120 - 12 ¹⁵ / ₁₆ "x47 ¹ / ₄ " Pcs. Box 2 - LM x Box 2,40	•	•	•	•	
 Step	Naturale R10 Rett. 33x120x3,2x3,2 12 ¹⁵ / ₁₆ "x47 ¹ / ₄ "x1 ¹ / ₄ "x1 ¹ / ₄ " Pcs. Box 2 - LM x Box 2,40	•	•	•	•	
 Corner Tile Right Left	Naturale R10 Rett. 33x120x3,2x3,2 12 ¹⁵ / ₁₆ "x47 ¹ / ₄ "x1 ¹ / ₄ "x1 ¹ / ₄ " Pcs. Box 1 - LM x Box 1,20	Right •	Right •	Right •	Right •	
		Left •	Left •	Left •	Left •	
Metalbrick	Dimensione Size					
 Bullnose	Lux 6x24 2 ³ / ₈ "x9 ⁷ / ₁₆ " Pcs. Box. 36	•	•	•	•	•

Trims within the scope of EN 14411:2016 have the same surface characteristics as the relative plain tiles.

PACKING AND WEIGHT

Size cm	Thickness mm	Pieces x Sqm	Pieces x Box	Sqm x Box	Weight x Box Kg	Boxes x Pal.	Sqm x Pal.	Weight x Pal. Kg
120x278 Naturale R9	6,5	0,30	1	3,336	50,04	vedi sotto - see below		
60x120 Naturale R10	9,5	1,39	2	1,440	31,68	36	51,84	1140
30x60 Naturale R10	9,5	5,56	6	1,080	23,76	48	51,84	1140
60x120 Metalriddle Naturale R10	9,5	1,39	2	1,440	31,68	36	51,84	1140
30x60 Metalriddle Naturale R10	9,5	5,56	6	1,080	23,76	48	51,84	1140
30x30 Mosaico 5X5 Naturale R10	9,5	11,11	5	0,450	8,73	60	27,00	524
6x24 Metalbrick Lux	9,5	69,44	36	0,518	11,40	95	49,25	1083

Slabs 120x278

Item	Size cm	No. of Slabs	Sqm per Pack	Weight of Packaging Kg	Weight of Packaging + Slabs Kg
 Crate	137x292x29h	5	16,68	107	357,20
	137x292x42h	18	60,05	145	1045,72
 A-Frame	75x290x160h	40	133,44	180	2181,60



STEELWORKS



Porcelain Tiles
ISO 13006 Annex G - UNI EN 14411 Annex G - Bla GL
ANSI A137.1 - CLASS P1



TECHNICAL FEATURES	STANDARD	VALUE		
WATER ABSORPTION	UNI EN ISO 10545/3	Conforme		
	ASTM C373	Compliant		
MODULUS OF RUPTURE	SPESSORE	6,5 mm	9,5 mm	
	UNI EN ISO 10545/4	≥ 35 N/mm ²	≥ 45 N/mm ²	
BREAKING STRENGTH	UNI EN ISO 10545/4	≥ 700 N	≥ 2000 N	
	ASTM C648	≥ 175 lbf	≥ 400 lbf	
FROST RESISTANCE	UNI EN ISO 10545/12	Conforme		
	ASTM C1026	Unaffected		
CHEMICAL RESISTANCE TO HIGH AND LOW ACID AND BASIC CONCENTRATIONS	UNI EN ISO 10545/13	A - LA - HA		
	ASTM C-650	Unaffected		
STAIN RESISTANCE	UNI EN ISO 10545/14	5		
	ASTM C1378	Class A		
SLIP RESISTANCE		NATURALE (6,5mm)	NATURALE (9,5 mm)	BRICK LUX
	DIN EN 16165 Annex B	R9	R10	-
	DIN EN 16165 Annex A	-	B (A+B)	-
	ANSI A326.3:2017 DCOF	WET ≥ 0,42	WET ≥ 0,50	-
	B.C.R.A. D.M. N. 236 14/6/89	> 0,40	> 0,40	-
	AS 4586-2013 Anexo A	-	P2	-
	BS 7976-2: 2002 BSEN13036-4:2011 Pendulum testers	-	< 36 Moderate Slip potential - Slider 96	-
	UNE 41901:2017 EX DB SUA (actual)	-	-	-



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL COM/CG UL 2818



Colours and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. Product sizes indicated are nominal and like weights and colours undergo the typical variations of the ceramic process. The manufacturer reserves the right to change the technical and optical features of the materials illustrated at any time and without notice. These features are not legally binding.

SURFACE STATEMENTS

www.surfacestatements.com

Dark Naturale R10 Rett. 60x120 - 23^{5/8} x 47^{1/4}"



STEEL WORKS



SASSO